

ENVIROALERT PROFESSIONAL®


ENVIROALERT®

Accessory for use with:

- TEMP-UL-S *
- TEMP-L-S *
- TEMP-L-W *
- TEMP-H-S *
- TEMP-H-W *

* Operating Range for glycerin is -47.2°F to 77°F (-44° to 25°C)

NOTE: To monitor temperatures below freezing (32°F, 0°C) glycerin must be mixed with water; max limit of -47.2°F, -44°C. A mixture of 55% glycerin with 45% water, by volume, will accomplish this.

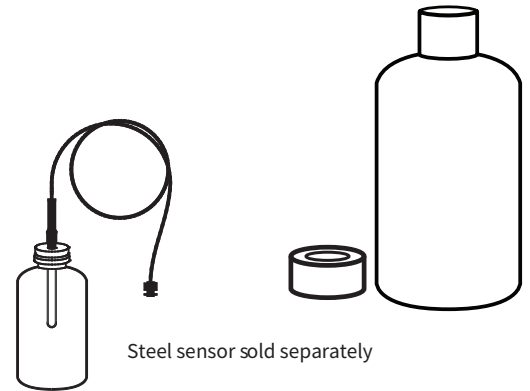

BOTTLE OF GLYCERIN FOR TEMP SENSOR BUFFER

Monitor temperature readings of stored product of similar mass.

- Slow sensor rate-of-change vs fast-reacting air temperature reading.
- Monitor temperatures above and below freezing.
- Avoid nuisance alarms for freezer/cooler defrost cycles.



Visit www.winland.com, call 800.635.4269 or email techsupport@winland.com to learn more.